



**TRUCKPAVE™ cellular
porous pavers**

T: +44 (0)1621 874200
F: +44 (0)1621 874299

Product Data Sheet

Issue: 03 Date: 30.08.2017

Characteristics	
Loading category	SLW 60 (DIN 1072)
Load-bearing capacity	<60tonnes gross vehicle weight
Crush resistance (unfilled)	1,500 tonnes(15,00kN)/SQM
Maximum axle load	20 tonnes (200kN)
Slip resistance	Low slip potential (dry) Moderate slip potential (wet)
Connection type	Tongue & groove
Dimensions	80mm x 400mm x 600mm
Cell wall thickness	40mm nominal
Nominal internal cell dimensions	100mm x 100mm square
% open cell	50
Quantity per m ²	4.2 pavers
Quantity [m ²] per pallet	80 [19.2]
Nominal weight (kg) [kg/m ²]	9 [37.5]
Material	Recycled mixed polymers
Colour	Grey
Chemical resistance	Excellent
UV resistance	High
Toxicity	Non toxic
Product guarantee	15 years
Anticipated design life	60 years #

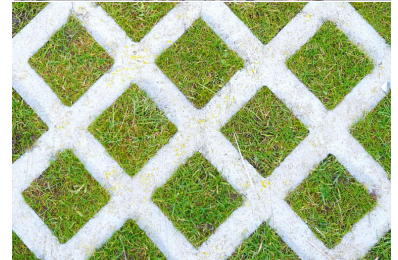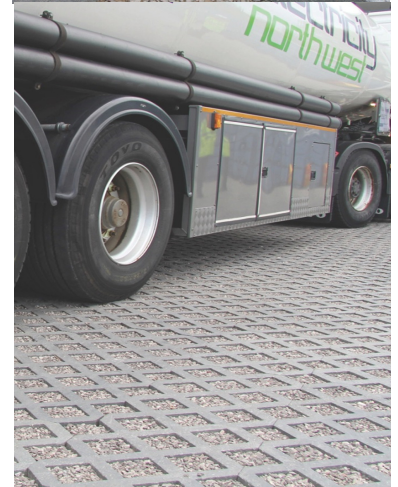

Long term durability will also depend upon the total traffic loading and the overall pavement construction.
As part of its continual improvement process Fiberweb Geosynthetics Ltd reserve the right to change
the properties listed on this data sheet without prior notice.

TM indicates a trade mark of Fiberweb plc or Berry Global, many of which are registered in a number of countries around the world.