

Railways



www.terram.com

 **TERRAM**
Geosynthetics you can trust



Geosynthetics in railways and related applications

TERRAM's PW range of geosynthetics perform up to four functions when used in trackbed construction:

Separation to maintain the integrity of adjacent soil types i.e. prevent intermixing

Filtration to prevent leaching of soil particles

Drainage to allow the free passage of water

Reinforcement to provide additional strength

The use of geosynthetics to reduce or replace traditional layers is now an accepted part of trackbed construction and renewals around the world. When correctly specified and installed, geotextiles and geogrids are proven to:

- enhance track performance
- significantly extend design life
- reduce the time required to renew a specific length of track (or allow more to be renewed in a fixed time)
- reduce overall material costs

TERRAM products and manufacturing capability

Part of the Berry Plastics Group, TERRAM manufactures geotextiles, geocells and geocomposites along with other related materials such as geonets, porous pavers and grass protection meshes that are proven and trusted throughout the UK and abroad.

The TERRAM team provides a unique range of value engineered solutions for the construction of highways, railways, landfills, pipelines, coastal / waterways defences and in landscape engineering.

With unrivalled expertise and experience in geosynthetics, accumulated over a 40 year period since the first TERRAM products were launched, TERRAM remains committed to the development of innovative and cost-effective geosynthetic solutions.

**Innovation and
value-engineered
solutions**

Extending trackbed life using geosynthetics



Sub-grade erosion pumping over a clay or silty sub-grade.

With ballast placed directly over a clay or silty sub-grade there is the possibility of a slurry being formed at the ballast / sub-grade interface; particularly if there are depressions or pockets at formation level.

Regular traffic causes the ballast to oscillate at the interface which disturbs the clay / silt, and the presence of water in the pockets causes the particles to form a slurry. As the ballast dilates, the slurry moves into the void. The slurry is pumped upwards as the ballast contracts. This rapid, cyclical effect causes the mobile clay/silt particles to be forced progressively up into the ballast.


An alternative to using a graded sub-ballast in this situation is described in 'Railtrack's Line Code of Practice' - Track Substructure Treatments 2 and 3 which describes a blanketing sand of specified grading is laid on the sub-grade to act as a fine soil filter / separator to prevent 'pumping'.

Using a filter/separator to replace part of a sand blanket


One of the purposes for using a sub-ballast or a sand blanket is to filter any ground-water so that the ballast does not become contaminated with soil particles as a result of sub-grade erosion.

Contamination would cause loss of ballast friction and deformation due to reduced load-bearing capacity in the sub-grade. The resulting effect on track alignment would mean a reduction in track speed and, ultimately, track renewal.

A 300mm deep layer of sand was originally introduced in the UK to prevent ballast contamination but it was later found that this could be reduced to 100mm if a geotextile filter / separator was used at the sand/ballast interface – TERRAM PW1. Although this geotextile allows downward movement of water coming via the ballast the relative change in permeability at this interface means this water drains laterally to track-side drains.

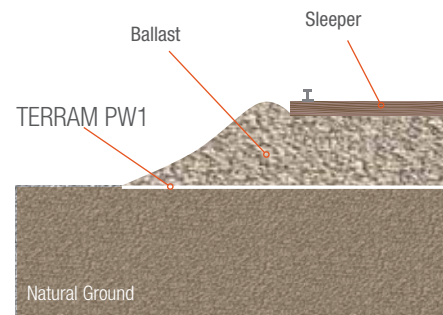

Typical trackbed layers

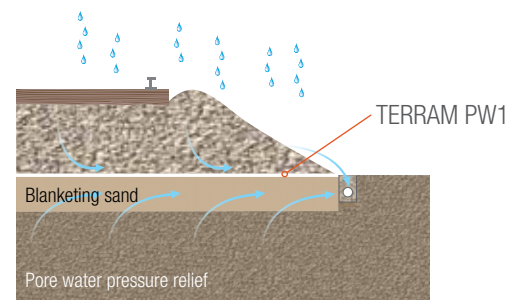


TERRAM PW1 used in conjunction with a sand blanket to prevent sub-grade erosion.



Sand does not contain the graded-gravel fraction of a sub-ballast and is thus prone to intermixing with the ballast. TERRAM PW1 also acts to prevent this.

Unlike sand, TERRAM PW1 is compact to transport and is rapidly laid ready for placement of the ballast. It has factory-controlled properties which do not rely on the need, unlike sand, for the correct thickness to be laid consistently across and along the track. In addition, excavation and the attendant disposal of fill is reduced when a geosynthetic is used to reduce the sand-blanket depth.

TERRAM PW1's ability to act as a filter over the design life is proven in countless projects around the world over the last twenty five years. Localised excavations along 8 to 10 year-old installations have revealed the TERRAM PW1 to be in good condition and visual inspection provided confidence that it would continue to do its job.

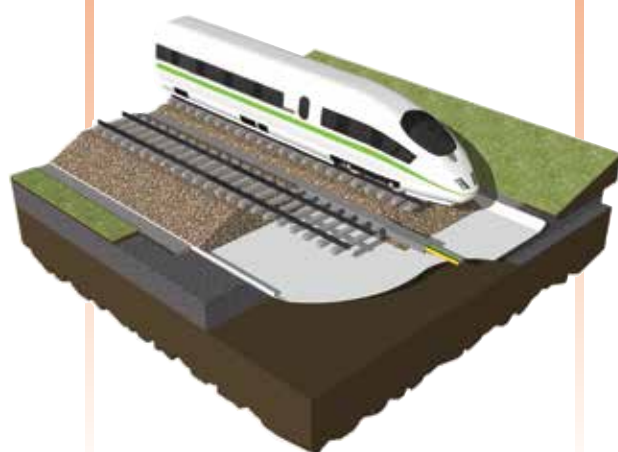

Preventing Clay Pumping



Placement of a sand blanket is time consuming. TERRAM can help you meet demanding schedules.

Replacing a sand blanket entirely

TERRAM has continued to develop and evaluate likely candidates for a sand-blanket replacement knowing that the ideal product would have to be:

- Quicker to install
- Lower in (installed) cost
- More readily available
- More environmentally friendly


TERRAM recognised that its own development needed to be focused on the filter function as TERRAM PW1 alone is not capable of preventing the passage of the smallest clay / silt particles.

TERRAM's innovation team have been developing filters for many industrial applications. The use of this expertise has been invaluable in designing a geosynthetic filter capable of preventing the passage of the smallest clay and silt particles. The solution was to sandwich a micro-porous filter at the centre of two robust layers of geotextile to protect it from potential damage. The result was the TERRAM Hydrotex range of geocomposites.





TERRAM Hydrotex composites allow pore-water pressure to dissipate whilst preventing fine clay and silt particles migrating to contaminate the ballast. In addition, an Hydrotex composite conforms to the formation profile to minimise the potential for ponding.

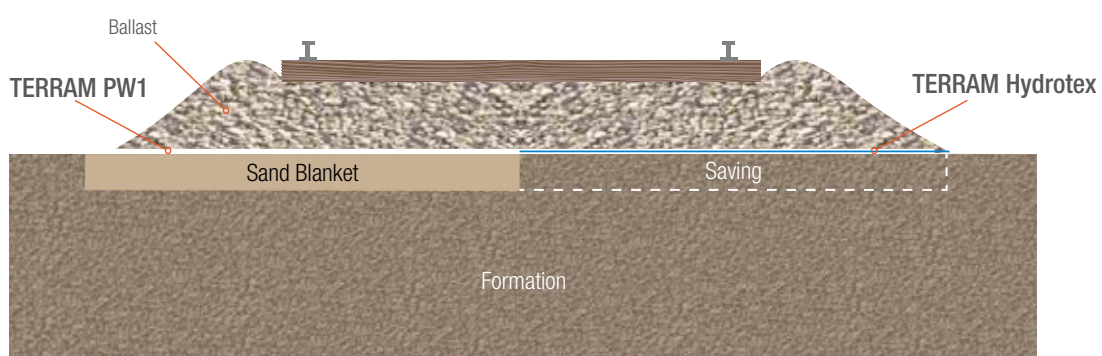

Replacing the whole of the sand blanket reduces the excavation that would normally be required to accommodate the sand and the attendant cost for disposing of the spoil.


Preventing sub-grade erosion



Preventing sub-grade erosion with fine soils, coarse soils and granular soils i.e. sand and gravel.

Preventing sub-grade erosion with fine soils

Fine soils are mixed soils, containing possibly all the grading sizes including clay, silt, sand and gravel. The clay and silt fractions dominate its engineering properties / behaviour. Sub-grade erosion over fine soils can be prevented by the inclusion of a Hydrotex geocomposite at the ballast / sub-grade interface.

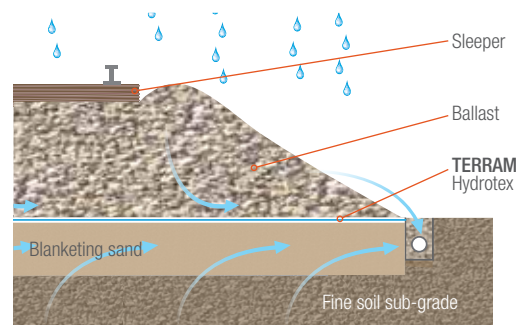



Preventing sub-grade erosion with coarse soils


Coarse soils are mixed soils containing possibly all the grading sizes including sand, gravel, silt and clay. The sand and gravel fractions comprise over 65% of the soil and dominate its engineering properties / behaviour.

One of the most common sub-grades comprises worn ballast, silt from the degraded ballast, sand, ash, and perhaps some silt and clay contamination. This can fall in the category of coarse soil.

With sub-grade erosion conditions, the silts and clays will have been washed out from the coarse soil immediately beneath the geotextile and been pumped through the geotextile to contaminate the lower ballast. Stable conditions will have been established when the washing out of the fines will have created a zone of granular particles immediately beneath the geotextile. Subsidence will have been minimal for a coarse soil dominated by sand and gravel because the fines can be washed out without the soil structure collapsing. A natural soil filter can then form below the granular zone thus preventing remaining fines being washed out.

This mechanism has been confirmed by reports of where silts and clays have contaminated the lower 25 to 50mm of the ballast at which point the contamination has ceased. The engineer needs to decide if contamination of the lower ballast is acceptable. If not, a sand blanket augmented by TERRAM PW1 can be used.

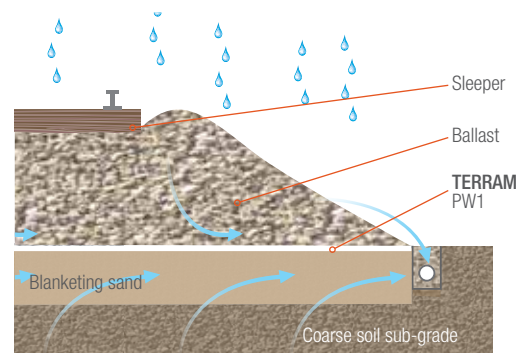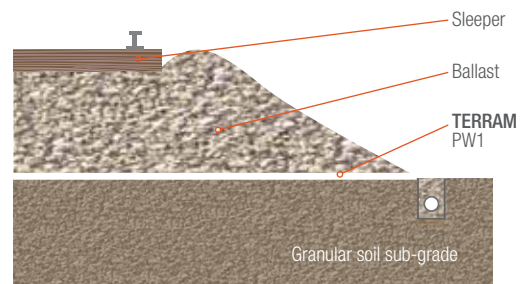

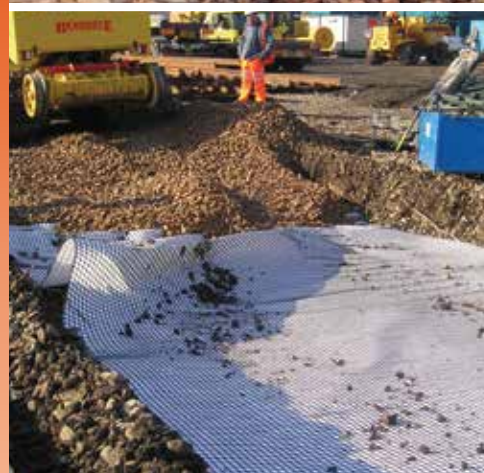

If some contamination can be accepted, the use of PW1 directly on top of the coarse soil, without a sand blanket, may be considered appropriate. It is recommended that this solution is only adopted if the percentage of silt and clay fraction in the coarse soil is less than 15%.


Preventing sub-grade erosion with granular soils i.e. sand and gravel

If ballast is to be placed directly on a loose, slightly silty, fine to medium sand with occasional gravel, and there is a high water table, then TERRAM PW1 will aid the construction process over what would be difficult ground. In addition, TERRAM PW1's pores will prevent leaching of the sand whilst allowing easy passage for the ground water expelled when the line is trafficked.


TERRAM PW1 Standard filter / separator should be used where there is an existing formation with a small percentage of coarse particles, i.e. <10% by weight <14mm.

TERRAM PW9 Robust filter / separator should be used in an existing formation with a larger percentage of coarse particles i.e. >10% by weight >14mm.

Soil conditions can vary considerably along a length of track. In some circumstances PW engineers may consider it to be cost effective to lay a geotextile for the entire length as a precaution against localised sub-grade variations. This approach is particularly relevant when using automatic, ballast-cleaning machines where the sub-grade may never be seen.

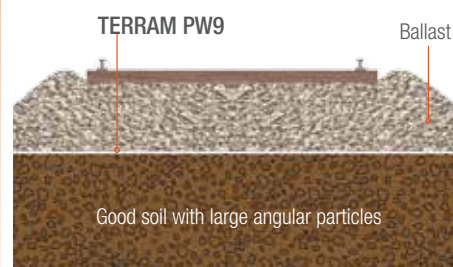

Ballast over weak sub-grade

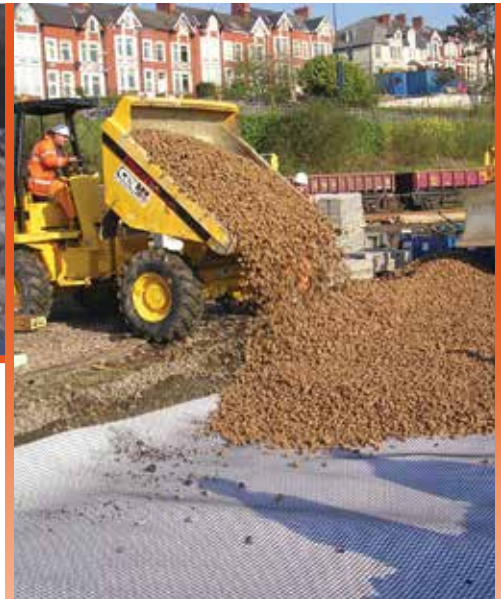

It's accepted that a geogrid stiffens the ballast by providing reinforcement at its base, and that this is highly desirable when track is being constructed over a soft sub-grade.

Ballast over weak sub-grades


TERRAM PW4-LA is a composite of TERRAM PW1 and a geogrid which speeds up the installation time when both reinforcement and a filter / separator are required.

An extensive, full-scale, independent research programme was carried out by British Rail and this clearly showed that the use of a geogrid beneath ballast over a soft sub-grade:

- helps to extend maintenance intervals by minimising settlement
- enables the rate of settlement to approach that of tracks on firm foundations
- has a stiffening effect and will reduce the elastic deflections
- can limit the lateral creep of ballast, reducing settlement and, therefore, the rate of deterioration of the vertical track geometry

Other benefits of using TERRAM PW4-LA are:

- provides a genuine alternative to increasing ballast depth or chemical stabilisation
- improves ballast performance and makes it more consistent
- allows consistent high speeds to be achieved
- avoids sub-grade excavation and replacement with thick layers of imported fill

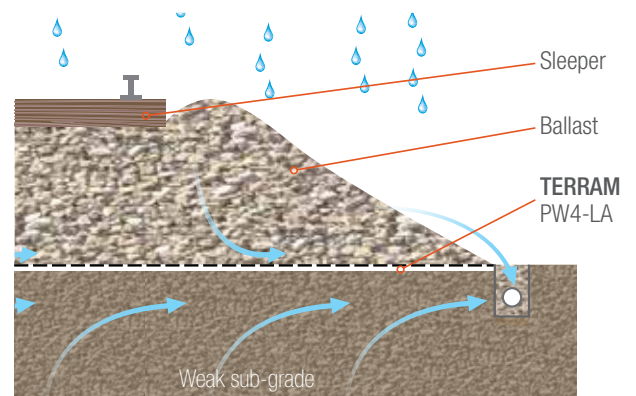



**Low load-bearing capacity
can exist with most soil types
including organic soils.**

Susceptibility of the sub-grade to erosion pumping may or may not be an issue. If it is then a suitable grade of Hydrotex or a sand blanket plus PW1 should be used in conjunction with the geogrid as required by the sub-grade type.



Controlling erosion on railway slopes



TERRAM GEOCELLS are three-dimensional blankets of interconnected cells which are placed on slopes, secured in position using pins, and filled with friable topsoil.

Controlling erosion on railway slopes

Once installed, a TERRAM GEOCELL provides immediate stability by confining the fill and greatly improves resistance to wind and run-off.

With a topsoil fill, the stability is further enhanced as vegetation becomes established and a geocell can be used to establish vegetation on slopes where establishing cover would otherwise have been a problem. The honeycomb of cells provides protection for the vegetation during the early, sensitive period of germination and growth.

The GEOCELLS are formed from TERRAM Geotextile to confine the fill and the permeable walls allow drainage from cell to cell down the slope. Other geocells achieve this cell-to-cell drainage by perforating the walls but this process can lead to weaknesses. Geocells fabricated from impermeable materials suffer from weiring - water cascading down the slope from cell to cell – and this causes ongoing loss of soil from the cells.


Many variables affect the installation and performance of a slope-protection geocell, including slope angle, slope stability, the infill type, rainfall levels and irrigation (if included). It is important therefore that due consideration is given to all relevant criteria on a project by project basis.

Typical applications include:


- cuttings and embankments
- noise-deflection and environmental bunds
- abutments
- steepened slopes
- soil nailing cover
- drainage ditches



TERRAM GEOCELLS are anchored to slopes using U shaped - TERRAM Fixing Pins - these combined with the weight of the soil prevents slippage.

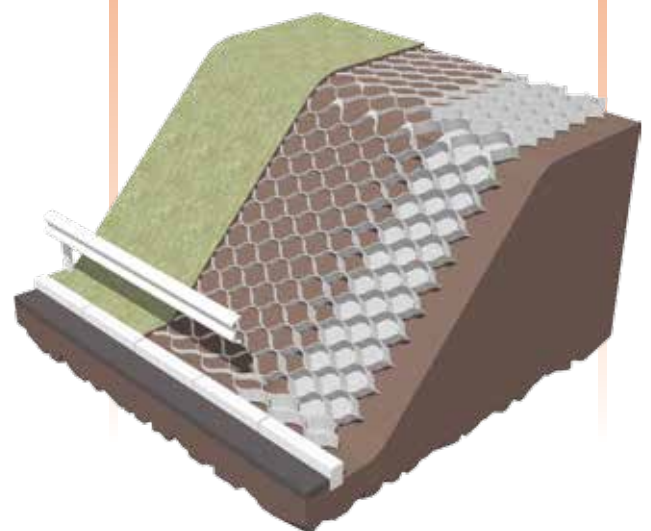

A TERRAM GEOCELL with its distinctive array of interconnected cells.

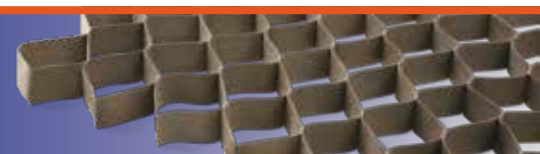


Product pages



TERRAM PW1


Trackbed Separator

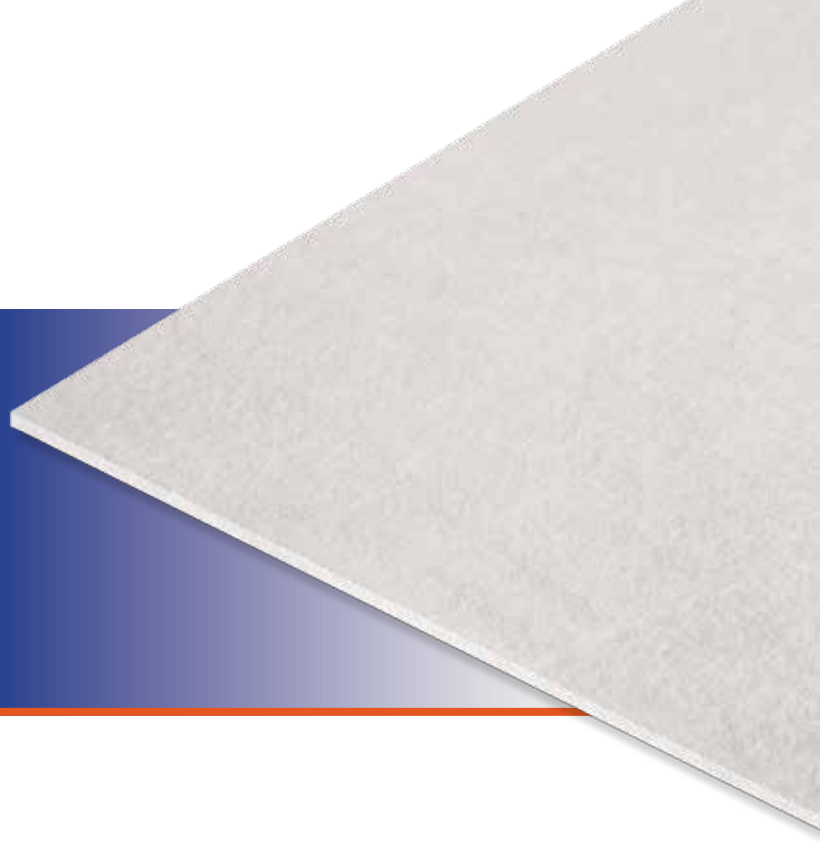

TERRAM PW1 trackbed separator is designed to maintain separation between the adjacent sand / ballast layers within the trackbed construction, preventing the upward movement of fine sub-grade particles.

TERRAM PW1 is suitable for where sub-grade soils are good, have sufficient strength and the particles are of even size.

TERRAM Geosynthetics provide solutions for permanent way applications where loss of rail track alignment caused by sub-grade erosion leads to costly maintenance and the complication caused by having to plan and temporarily close the track for its renewal.

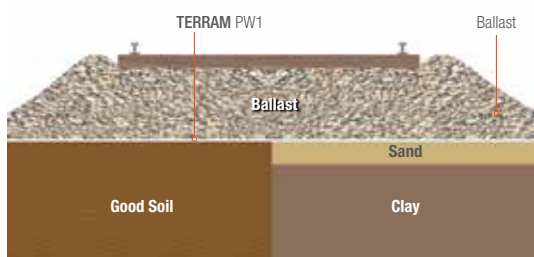

Scenario 1
Good soil sub-grade

Scenario 2
Clay sub-grade and sand blanket

Features:

- Needle-punched geotextile
- Suitable for good granular sub-grade soil
- Can be used as separation between ballast and a sand blanket
- High puncture and abrasion resistance
- High permeability properties




Roll Width (m)	Length (m)	Area m ²	TERRAM Code	PADs Code
2	50	100	153725	0057/100568
3.5	25	87.5	157600	0057/100560
3.5	50	175	155439	0057/100569
3.7	25	92.5	157617	0057/100559
3.9	25	97.5	157532	0057/100555
4	25	100	152926	0057/100567
4	50	200	152919	0057/100561

TERRAM product specifications can be downloaded from **www.terram.com**

TERRAM PW2

Robust Trackbed Separator

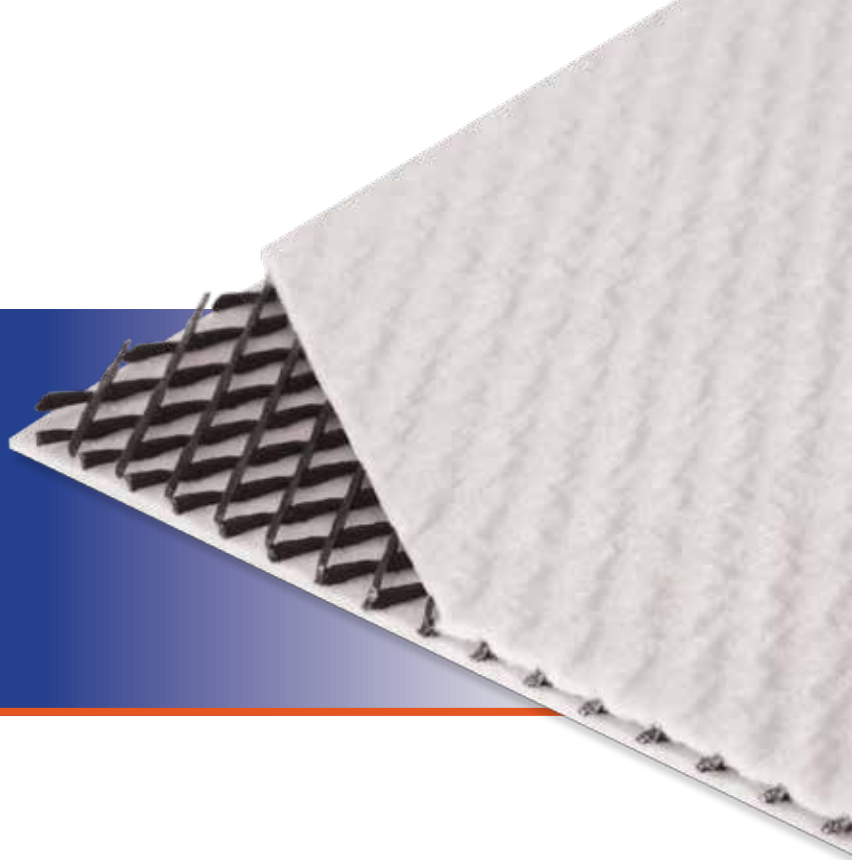

TERRAM PW2 is a robust trackbed separator used where the sub-grade soils are good but contain angular stone. PW2 is also a drainage-enhancing composite used in wet conditions where poor drainage or a high water table exists.

15

TERRAM PW2 is a geocomposite- a robust separator/filter incorporating a stiff net between two textile filter layers

TERRAM Geosynthetics provide solutions for permanent way applications where loss of rail track alignment caused by sub-grade erosion leads to costly maintenance and the complication caused by having to plan and temporarily close the track for its renewal.

Features:

- Suitable for sub-grades containing angular stone
- Prevents sub-grade erosion
- Incorporates a geonet sandwiched between two geotextile layers




Roll Width (m)	Length (m)	Area m ²	TERRAM Code	PADs Code
2	25	50	153732	0057/100777
3.5	25	87.5	157570	0057/100637
3.7	25	92.5	157587	0057/100636
3.9	25	97.5	157594	0057/072410
4	25	100	153749	0057/100638

TERRAM product specifications can be downloaded from **www.terram.com**



TERRAM PW3.1

Trackbed Drainage Geocomposite

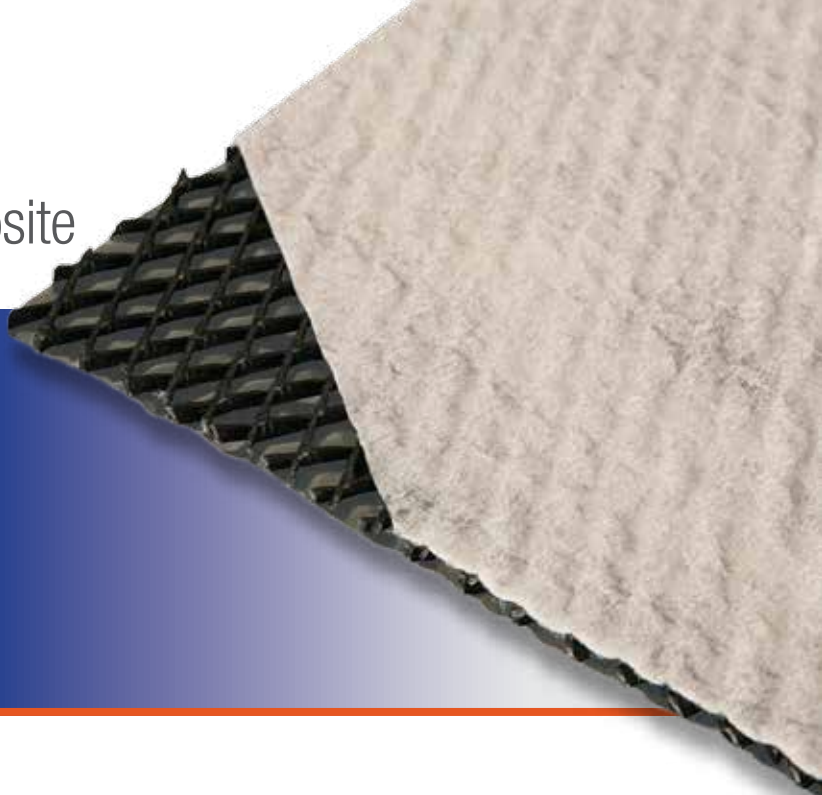

TERRAM PW3.1 is a specialist drainage composite with one impermeable side, which enables a barrier between water and formation where required. It comprises of a high quality black LDPE impermeable membrane, a drainage net and TERRAM PW1 geotextile.

TERRAM PW1 is suitable for where sub-grade soils are good, have sufficient strength and the particles are of even size.

TERRAM Geosynthetics provide solutions for permanent way applications where loss of rail track alignment caused by sub-grade erosion leads to costly maintenance and the complication caused by having to plan and temporarily close the track for its renewal.

Features:

- Intercepts water
- Drains laterally into side drains
- Maintains good dry sub-base conditions


Roll Width (m)	Length (m)	Area m ²	TERRAM Code	PADs Code
4	50	200	166282	0057/100715
4	25	100	-	-

TERRAM product specifications can be downloaded from **www.terram.com**



TERRAM PW4-LA

Reinforced Trackbed Separator

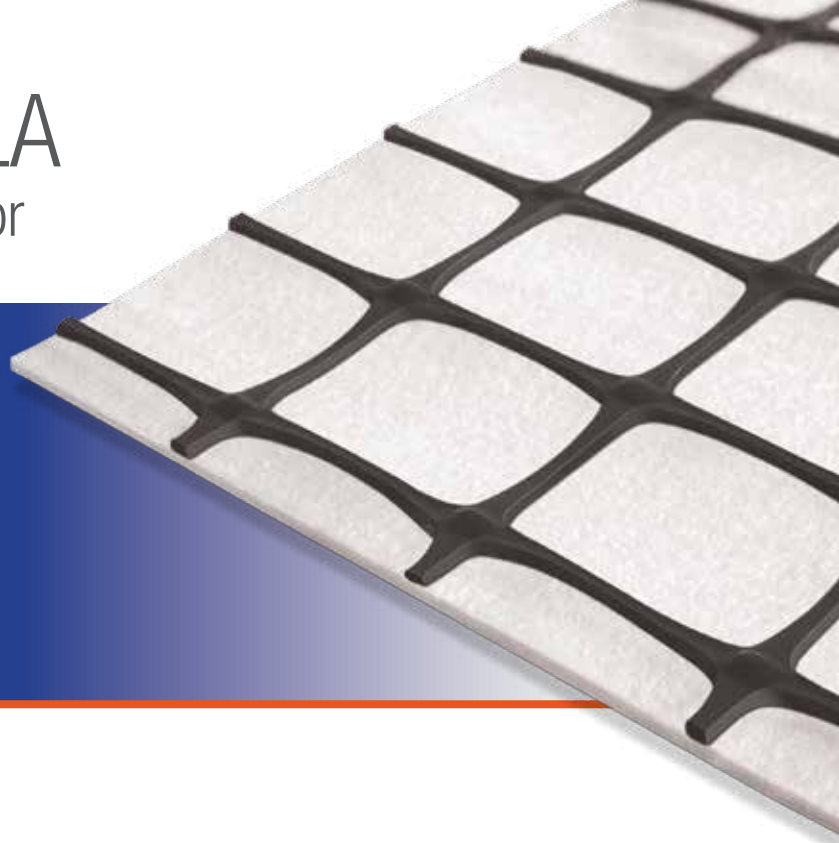

TERRAM PW4-LA is a reinforced trackbed separator used where the sub-grade is weak, ie. soft and boggy conditions. It combines a filter / separator geotextile and reinforcement geogrid.


17

TERRAM PW4-LA is a composite formed from TERRAM PW1 and Tensar SSLA30 geogrid. Tensar SSLA30 improves track life and performance by stiffening ballast laid over weak ground. The advantage of TERRAM PW4-LA is the speed at which a geotextile filter and grid reinforcement can be laid in a single pass with the beneficial effect on construction costs.

TERRAM Geosynthetics provide solutions for permanent way applications where loss of rail track alignment, caused by sub-grade erosion, leads to costly maintenance and the complication caused by having to plan and temporarily close the track for its renewal.

Features:

- Suitable for weak sub-grade soils (soft & boggy conditions)
- Helps to improve track life by stiffening ballast laid over weak ground
- Improves load-bearing capacity

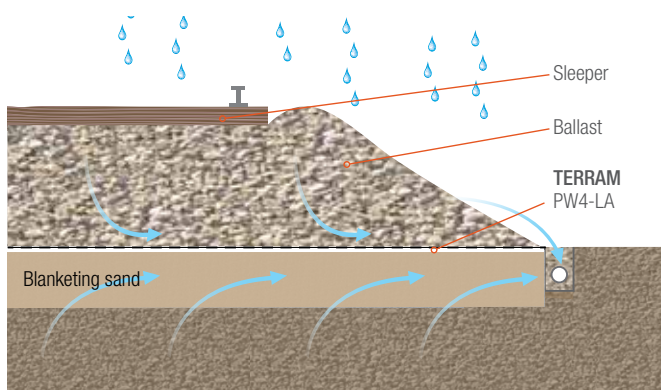


Roll Width (m)	Length (m)	Area m ²	TERRAM Code	PADs Code
1.9	25	47.5	157983	0057/100644
3.8	25	95	153435	0057/100779

TERRAM product specifications can be downloaded from **www.terram.com**



TERRAM PW9

Reinforced Trackbed Separator

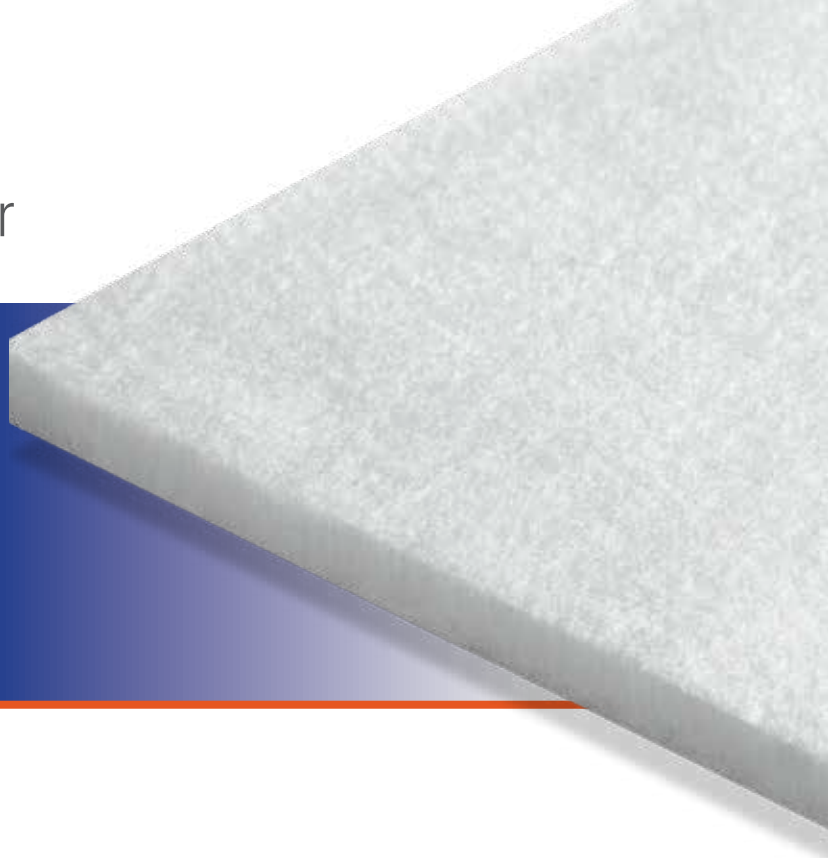

TERRAM PW9 is a robust separator used where the sub-grade soils are good but contain angular stone. PW9 is a next generation separator, used where there is a significant amount of coarse granular particles 14mm and above.

TERRAM PW9 is a mechanically entangled robust separator / filter that provides protection from angular stone damage.

TERRAM Geosynthetics provide solutions for permanent way applications where loss of rail track alignment caused by sub-grade erosion leads to costly maintenance and the complication caused by having to plan and temporarily close the track for its renewal.

Features:

- Suitable for good soils containing angular stone
- Robust non-woven geotextiles protect the separation function
- Separates ballast and angular sub-bases




Roll Width (m)	Length (m)	Area m ²	TERRAM Code	PADs Code
1.95	25	48.75	-	-
3.5	25	87.5	161461	0057/072424
3.7	25	92.5	161454	0057/072425
3.9	25	97.5	161447	0057/072426
3.9	50	195	161409	0057/072440
3.9	100	390	161362	0057/072439
4	25	100	161430	0057/072441
4	50	200	161393	0057/072423
4	100	400	161355	0057/072427

TERRAM product specifications can be downloaded from **www.terram.com**



TERRAM Hydrotex™

Trackbed Separator for Clay Pumping

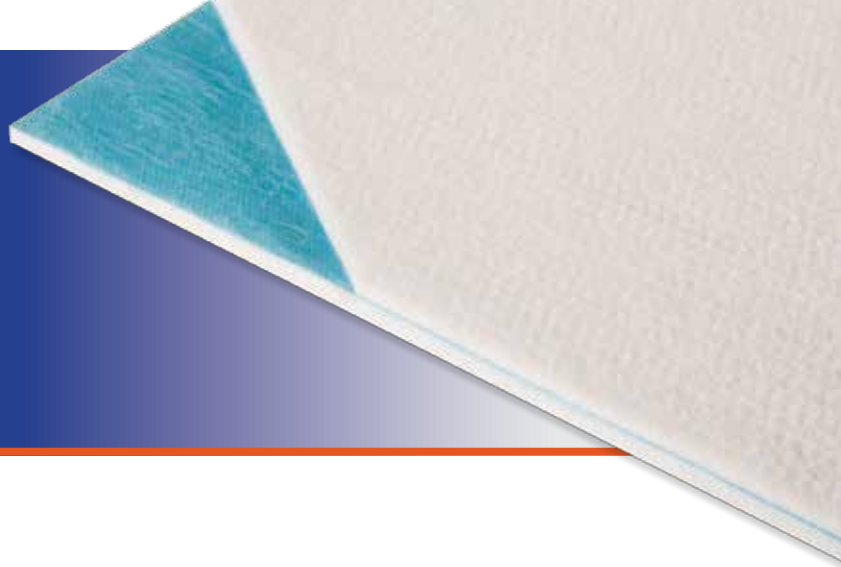

TERRAM Hydrotex provides a permanent way solution for areas where clay pumping can cause a loss of trackbed stability. It removes the requirement for a sand blanket.

19

TERRAM Hydrotex not only acts as a filter / separator for fine soils, but also removes the requirement for a sand blanket, preventing the upward movement of fine clay particles.

TERRAM Hydrotex nonwoven composite consists of a central filter media, thermally bonded to two opposing mechanically entangled nonwoven robust filters, to create a geocomposite with sufficient strength and protection to be durable to the abrasion and point loading of ballast.


The traditional use of a sand blanket in railway trackbed uses a sub-ballast and / or a graded-sand layer to prevent the upward movement of fine sub-grade particles, while allowing effective drainage and dissipation of pore water pressure. TERRAM Hydrotex offers this solution in one geocomposite.

Features:

- Acts as a filter / separator for fine soils
- Removes the requirement for a sand blanket
- Prevents upward particle passage
- Allows upward and downward water transmission

Environmental Benefits:

TERRAM Hydrotex composite reduces the depth of excavation that would be required with a sand blanket. The result is a decrease in the amount of spoil being taken away for landfill and a reduction of vehicles required to deliver materials.

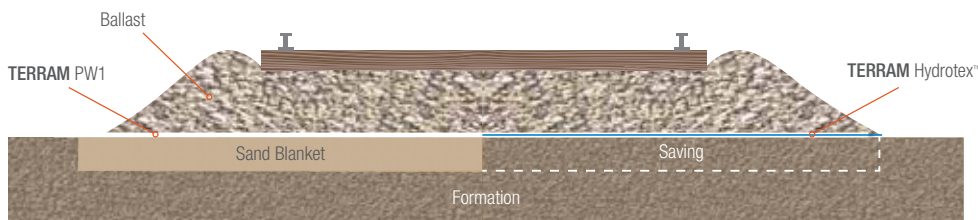

Roll Width (m)	Length (m)	Area m ²	TERRAM Code	PADs Code
3.5	25	87.5	171309	0057/101455
3.7	25	92.5	171323	0057/100454
3.9	25	97.5	171347	0057/100453
3.9	50	195	171101	0057/100457

TERRAM product specifications can be downloaded from **www.terram.com**



Application specific literature, product data sheets, case studies and installation guides are available on request or can be freely downloaded from **www.terram.com**

Information contained herein is, to the best of our knowledge, accurate in all material respects. However, since the circumstances and conditions in which such information and the products mentioned herein can be used may vary and are beyond our control, no representation or warranty, express or implied, of any nature whatsoever is or will be made and no responsibility or liability is or will be accepted by us, any of our affiliates or our or their respective directors, officers, employees or agents in relation to the accuracy or completeness or use of the information contained herein or of any such products and any such liability is hereby expressly excluded to the maximum extent permitted by law.

TERRAM excels in the innovative application of technology to create versatile, high-performance materials which are unique, cost-efficient and deliver significant added value.



Contact details:

United Kingdom
Tel: +44 (0)1621 874200
Fax: +44 (0)1621 874299
Email: info@terram.com
www.terram.com



A Berry Plastics Company
Fiberweb Geosynthetics Ltd
Blackwater Trading Estate
The Causeway, Maldon, CM9 4GG
United Kingdom