


**BODPAVE™ 85 cellular
porous pavers with
castellated cells**

T: +44 (0)1621 874200
F: +44 (0)1621 874299

Product Data Sheet

Issue: 02 Date: 08.06.17

Characteristics	
Load-bearing capacity (filled)	400 t/m ²
Crush resistance (unfilled)	<250t
Connection & locking type	Overlapping edge loop & cell connection with integral, self-locking, snap-fit clips
Basal support & anti shear	Integral 35mm long ground spikes (18/paver) with cross & T section
Dimensions	500mm x 500mm x 50mm deep plus 35mm long ground spike
Cell wall thickness	2.5mm - 4.4mm
Nominal internal cell dimensions	67mm (cruciform) & 46mm (round)
% open cell	92% (top)/75% (base)
Quantity per m ²	4 pavers
Weight	1.56kg (6.24kg/m ²)
Polymer	Recycled and Recyclable high density polyethylene
Colour	Black/Green*
Chemical resistance	Excellent
UV resistance	High
Toxicity	Non toxic

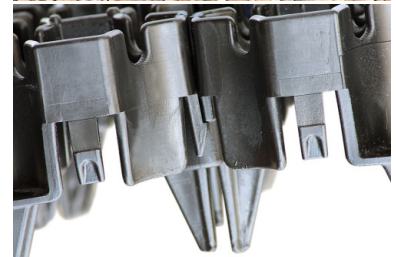

* Please note that when using recycled HDPE it is difficult to maintain colour consistency across single green pavers, and from one green paver to another.

In addition, virgin polymer may be used to manufacture the green pavers when recycled green HDPE is in short supply.

As part of its continual improvement process Fiberweb Geosynthetics Ltd reserve the right to change the properties listed on this data sheet without prior notice.

TM indicates a trade mark of Fiberweb plc or Berry Global, many of which are registered in a number of countries around the world.